

PROJECT	DATE
TYPE	CATALOG #

## FLAT TOP

### ADJUSTABLE WELL LIGHT IG-63-00B

#### KEY FEATURES

- SOLID CAST BRASS TOP
- OPEN DESIGN FOR MAXIMUM LIGHT OUTPUT
- WATER TIGHT RUBBER GASKET
- DIMMABLE\*
- TEMPERED, SHOCK AND HEAT RESISTENT LENS
- 25° ADJUSTABLE LAMP POSITION
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP

#### PRODUCT SPECIFICATIONS

MATERIAL	CAST BRASS TOP / PVC BODY
LENS	CLEAR FLAT TEMPERED
SOCKET	BI PIN
LAMP	MR16 (MAX 35W)
VOLTAGE	9-15V AC/DC
LEAD WIRE	38"
PROJECTION	UP TO 50 FT

#### STEP 1

##### FIXTURE CONFIGURATION

**IG-63-00B**

FINISH


NBZ NATURAL BRONZE

#### HOUSING DETAILS

ADJUSTABLE



HOUSING



#### STEP 2

##### LED LAMP CONFIGURATION

**LED-MR16**

LED WATTAGE

3.5W 280 LM

4.5W 320 LM

5.5W 420 LM

KELVIN TEMPERATURE

27K 2700K

30K 3000K

41K 4100K\*

55K 5500K\*

BEAM ANGLE

15D 15° NARROW \*\*

45D 45° STANDARD

60D 60° WIDE

\* Dimmable: See [MR16 LED Lamps Spec Sheet](#) for additional details

\* Available in 45° only

\*\* Available in 3.5w & 5.5w, 3000K only




PROJECT	DATE
TYPE	CATALOG #

## INSTALLATION INSTRUCTIONS

### PRE-INSTALLATION GUIDELINES

All In Ground fixtures should be installed so that water will be able to drain away from the fixture. We recommend using pea gravel or sand as this will allow for superior drainage.


### 1 DIG HOLE

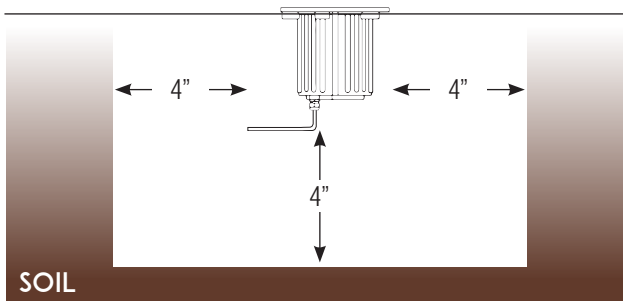

Dig hole approximately 1 ft. in diameter by 1 ft. deep.

Leave approximately 4 in. surrounding the fixture for sand or pea gravel.


### 2 WIRE CONNECTION

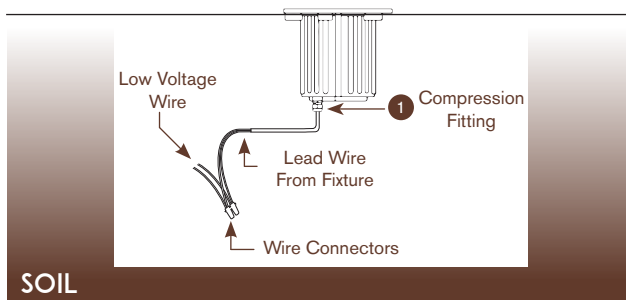

Hand tighten compression fitting ①  
(Do not use tools and do not over tighten)

Install your lead wire from fixture to your low voltage wire using silicone filled wire connectors. We also recommend applying silicone around wires, bottom plug and top of fixture.

### 3 FILL HOLE

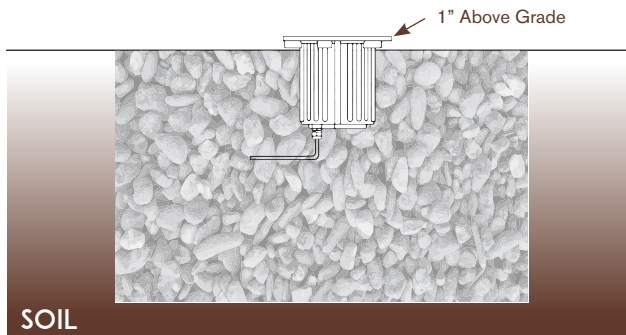

Fill hole with pea gravel or sand.

Adjust the fixture so that the top edge is above the grade by 1".

Install LED lamp inside fixture. (Adjust gimble ring to desired angle)

Tighten the (5) screws on the face of the base, insuring the gasket has a complete seal.

**For optimum performance:** Do not cover or surround well light with any leaves, mulch, bark or other material that could cause a fire or damage the lens.