



PROJECT	DATE
TYPE	CATALOG #

# ARTICULATING PATH 1


## AP-320B

### KEY FEATURES

- CONTEMPORARY DESIGN
- SOLID BRASS
- ARTICULATING HEIGHT FOR PRECISE LIGHT SPREAD
- REFLECTIVE WHITE COATING FOR MAXIMUM LIGHT OUTPUT
- UV PROTECTED FROSTED ACRYLIC LENS
- HIGH TEMPERATURE SOCKET
- FIELD REPLACEABLE LED

### PRODUCT SPECIFICATION

LENS	FROSTED ACRYLIC
SOCKET	BI PIN
LAMP	ENCAPSULATED T3/G4
VOLTAGE	9-18V AC/DC
LIGHT SPREAD	6-8 FT AVG
LEAD WIRE	3 FT

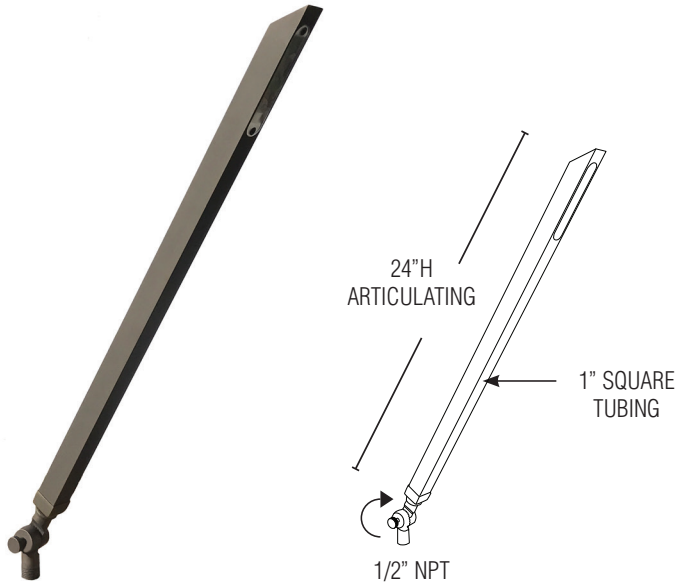

### STEP 1

#### FIXTURE CONFIGURATION

**AP-320B**

FINISH OPTION

- NBZ NATURAL BRONZE
- SS STAINLESS STEEL

### STEP 3

#### ACCESSORY OPTIONS

**AX-800P**  
INCLUDED

STAKE OPTION

- AX-800P STANDARD SLOTTED STAKE
- AX-802P HEAVY DUTY PERMA POST

### STEP 2

#### LED LAMP CONFIGURATION

**LED-T3**

LED WATTAGE

- 1.5W 110 LM
- 2.5W 210 LM
- 3.5W 280 LM

KELVIN TEMPERATURE

- 27K 2700K
- 30K 3000K

ENCAPSULATED

ENC ENCAPSULATED (IP67)

\* Dimmable: See [ENCAPSULATED T3 LED Lamps Spec Sheet](#) for additional details