



PROJECT	DATE
TYPE	CATALOG #

TIPARILLO


FL-103B

KEY FEATURES

- FULLY ADJUSTABLE SHROUD FOR GLARE CONTROL
- CAST BRASS
- NATURAL BRONZE FINISH GUARANTEED NOT TO CHIP, FLAKE OR PEEL
- TEMPERED, SHOCK AND HEAT RESISTENT LENS
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP
- DIMMABLE*

PRODUCT SPECIFICATIONS

MATERIAL	CAST BRASS
LENS	CLEAR FLAT TEMPERED
SOCKET	BI PIN
LAMP	MR8
VOLTAGE	12V AC/DC
PROJECTION	UP TO 15 FT
LEAD WIRE	3 FT

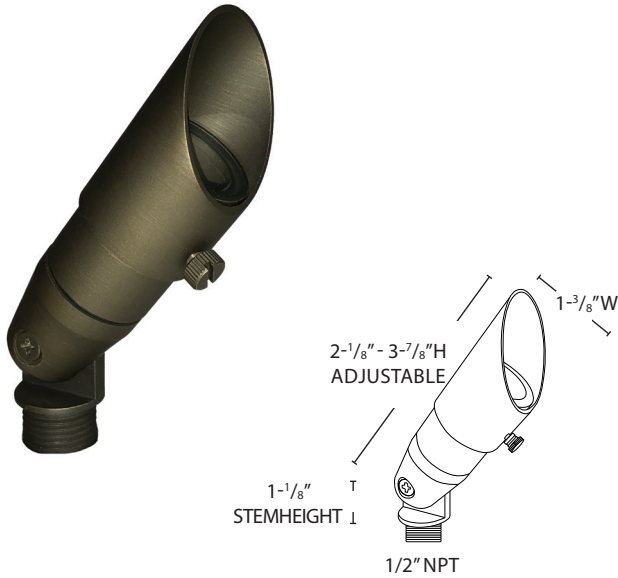

STEP 1

FIXTURE CONFIGURATION

FL-103B

FINISH

NBZ NATURAL BRONZE

STEP 3

ACCESSORY OPTIONS

AX-800P

INCLUDED

STAKE OPTION

AX-800P STANDARD SLOTTED STAKE

AX-802P HEAVY DUTY PERMA POST

SURFACE/TREE MOUNT OPTION

AX-803B DEEP ROUND BASE (NBZ)

AX-804B ROUND BASE (NBZ)

AX-912B TREE STRAP-RATCHET MOUNT

STEP 2

LED LAMP CONFIGURATION

LED-MR8

LED WATTAGE

2.5W 125 LM

KELVIN TEMPERATURE

27K 2700K

30K 3000K

BEAM ANGLE

80D 80° WIDE

* Dimmable: See MR8 LED Lamps Spec Sheet for additional details