



PROJECT	DATE
TYPE	CATALOG #


ARCHITECT SPECIFIER

ALUMINUM ACCENT LIGHT FL-501A



•FLAT SHROUD
•BRONZE FINISH
(ALSO AVAILABLE IN BLACK FINISH)

•ANGLED SHROUD
•BLACK FINISH
(ALSO AVAILABLE IN BRONZE FINISH)

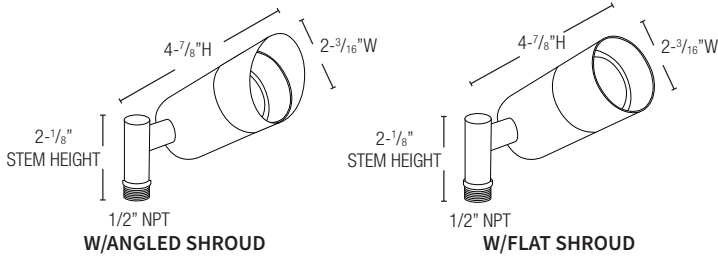

KEY FEATURES

- CONTEMPORARY DESIGN
- COMES W/BOTH FLAT AND ANGLED SHROUDS
- CAST ALUMINUM
- BRONZE OR BLACK FINISH OPTIONS
- TEMPERED, SHOCK AND HEAT RESISTANT LENS
- HIGH TEMPERATURE CERAMIC SOCKET
- FIELD REPLACEABLE LED LAMP
- DIMMABLE*

PRODUCT SPECIFICATIONS

MATERIAL	CAST ALUMINUM
FINISH	BRONZE OR BLACK
LENS	CLEAR FLAT TEMPERED
SOCKET	BI PIN
LAMP	MR16
VOLTAGE	12V
PROJECTION	UP TO 50 FT
LEAD WIRE	3 FT

STEP 1

FIXTURE CONFIGURATION

FL-501A

FINISH OPTION

BZ BRONZE

BK BLACK

STEP 3

ACCESSORY OPTIONS

AX-800P INCLUDED

STAKE OPTION

AX-802P HEAVY DUTY PERMA POST

SURFACE/TREE MOUNT OPTION

AX-804A ROUND BASE (BK OR BK)

AX-912B TREE STRAP-RATCHET MOUNT

STEP 2

LED LAMP CONFIGURATION

LED-MR16

LED WATTAGE

3.5W 280 LM

4.5W 320 LM

5.5W 420 LM

7W 500 LM

KELVIN TEMPERATURE

27K 2700K

30K 3000K

BEAM ANGLE

15D 15° NARROW *

45D 45° STANDARD

60D 60° WIDE

* 15° Only available in 3.5w and 5.5w - 2700k or 3000k

+Fully tested with Lutron Diva (DVLV-600P) dimmer and Lightcraft dimmable transformers and LED lamps.