

ETL LISTED
COMPLIES WITH
UL1838

PROJECT	DATE
TYPE	CATALOG #

6W ET POWER FLOOD

LED-FL-113B-6W

KEY FEATURES


- INTEGRATED LED WITH HIGH LUMEN OUTPUT
- QUICK CHANGE LED TECHNOLOGY ALLOWS FOR EASY REPLACEMENT OF LED BOARD IN THE FIELD
- DIMMABLE*
- HEAVY CAST BRASS
- NATURAL BRONZE FINISH GUARANTEED NOT TO CHIP, FLAKE OR PEEL
- TEMPERED, SHOCK AND HEAT RESISTANT STEP GLASS

PRODUCT SPECIFICATIONS

MATERIAL	CAST BRASS
FINISH	NATURAL BRONZE
LENS	CLEAR DOUBLE STEP GLASS
LED	6W SMD
LUMENS	350
VOLTAGE	11-13V AC/DC
PROJECTION	UP TO 30 FT
LEAD WIRE	3 FT

STEP 1

FIXTURE CONFIGURATION

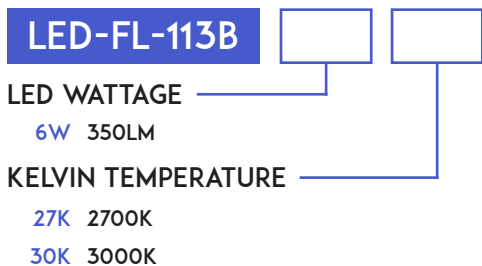

STEP 2

ACCESSORY OPTIONS



SURFACE/TREE MOUNT OPTION

- AX-803B DEEP ROUND BASE (NBZ)
- AX-804B ROUND BASE (NBZ)
- AX-912B TREE STRAP-RATCHET MOUNT

*PRIMARY SIDE DIMMING: Requires LED magnetic low voltage (MLV) or LED electronic low voltage (ELV) dimmable transformer and compatible LED dimmer (MLV or ELV) For more information see installation guidelines
+ Fully tested with Lutron Diva (DVLV-600P) dimmer and Lightcraft dimmable transformers

*LOW VOLTAGE SIDE DIMMING: Requires Lightcraft 12V In Line Dimmer



PROJECT	DATE
TYPE	CATALOG #

FEATURES



BUILT-IN LOW PROFILE
GLARE SHIELD

DRAINAGE GROOVE

HEAT TREATED &
TEMPERED STEP GLASS


HIGH OPTIC LENS WITH
60° LIGHT SPREAD

FIELD REPLACEABLE LED WITH QUICK
CHANGE LED TECHNOLOGY

6W SMD LED BOARD
(AVAILABLE IN 2700K OR 3000K)

HIGH QUALITY HEAT SINK

QUICK CHANGE TECHNOLOGY

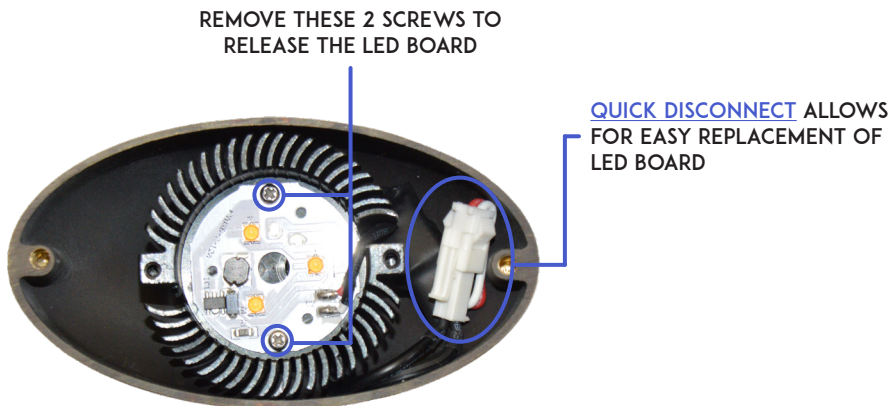

REMOVE THESE 2 SCREWS TO
RELEASE THE LED BOARD

QUICK DISCONNECT ALLOWS
FOR EASY REPLACEMENT OF
LED BOARD