



| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

E26 ARCHITECTURAL STRING

BK-E26




STRING DIMENSIONS




+ String and lamps are sold separately

SOCKET DIMENSIONS



SOCKET TOP VIEW

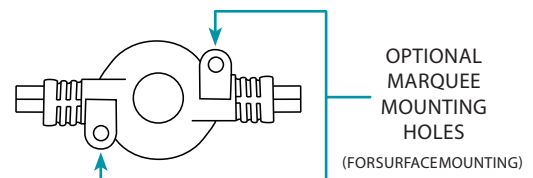

KEY FEATURES

- UV RESISTANT MATERIALS
- PVC SOCKET FORMS A TIGHT WATER SEAL
- COMMERCIAL GRADE
- SPECIFY CUSTOM CUTS BY THE FOOT
- FIELD CUTABLE BETWEEN SOCKETS
- 2 YEAR LIMITED WARRANTY
- ETL LISTED
- INTENDED FOR LAMP-DOWN APPLICATIONS ONLY

*Check with local building and safety inspectors for specific requirements

**Lightcraft recommends the use of guy wire for runs of 35' or more

PRODUCT SPECIFICATIONS

| | |
|---------------|---|
| MATERIAL | SPT-2 |
| WIRE COLOR | BLACK |
| WIRE GAUGE | 16 AWG |
| SOCKET | E26 (MEDIUM BASE) |
| MAX WATTAGE | 25W PER SOCKET |
| 12V MAX RUN | 200 FT |
| 120V MAX RUN | 300 FT (1200 WATT MAX) |
| SPACING | 24" BETWEEN SOCKETS |
| VOLTAGE | 12V OR 120V |
| 12V WIRING | DIRECT TO LOW VOLTAGE TRANSFORMER |
| 120V WIRING | HARD WIRE OR SPECIFY POWER PLUG (PART: BK-PWR-MALE) |
| CERTIFICATION | ETL WET LOCATION |



| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

S14 LAMPS (OUTDOOR/INDOOR RATED)



Lightcraft Outdoor's LED Filament Collection offers a dimmable 1W vintage style filament LED with an antique 2400K warm white light output. Available in 12VAC to easily integrate with your low voltage landscape lighting system. Also available in 120VAC.

12V FILAMENT LED



LED-BK-S14-1-12-FIL

WATTAGE 1W
 KELVIN 2400K
 LUMENS 45
 DIMMABLE YES*
 VOLTAGE 11V AC - 13V AC
 BASE MEDIUM (E26)


120V FILAMENT LED



LED-BK-S14-1-120-FIL

WATTAGE 1W
 KELVIN 2400K
 LUMENS 100
 DIMMABLE YES*
 VOLTAGE 120V AC
 BASE MEDIUM (E26)

S14 LAMP DIMENSIONS

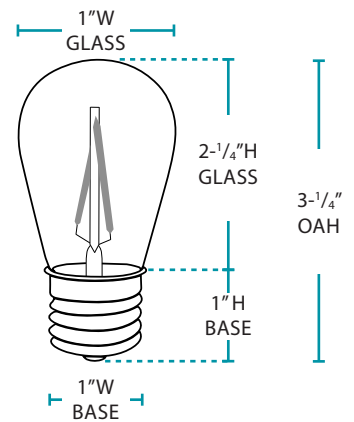

Dimensions for all S14 lamps on this page.

*PRIMARY SIDE DIMMING: Requires LED magnetic low voltage (MLV) or LED electronic low voltage (ELV) dimmable transformer and compatible LED dimmer (MLV OR ELV) For more information see installation guidelines
 + Fully tested with Lutron Diva (DVLV-600P) dimmer and Lightcraft dimmable transformers

*LOW VOLTAGE SIDE DIMMING: Requires Lightcraft 12V In Line Dimmer

DECORATIVE BISTRO SHADES (FOR E26 NON SUSPENDED BISTRO STRING ONLY)

These shade options are ideal for customizing the look of the architectural bistro string. The shades also serve to achieve a DARK SKY design and avoid overhead light pollution.

PETAL SHADE



MODEL BK-111-BZ
 DIMENSIONS 7-1/2"W X 3"H
 MATERIAL ALUMINUM
 OUTSIDE FINISH BRONZE (BZ)
 INSIDE FINISH WHITE REFLECTIVE

HAMMERED SHADE



MODEL BK-411-BZ
 DIMENSIONS 8"W X 2"H
 MATERIAL ALUMINUM
 OUTSIDE FINISH BRONZE (BZ)
 INSIDE FINISH WHITE REFLECTIVE

NEW ITEM PYRAMID SHADE



MODEL BK-511-BZ
 DIMENSIONS 4-1/2"W X 2-3/4"H
 MATERIAL ALUMINUM
 OUTSIDE FINISH BRONZE (BZ)
 INSIDE FINISH WHITE REFLECTIVE



| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

MOUNTING INSTALLATION ACCESSORIES

GALVANIZED AIRCRAFT CABLE



MODEL BK-CABLE-1/16
MATERIAL GALVANIZED
DIAMETER 1/16" (7X7)
STRENGTH 480 LBS RATING
ROLL SIZE 250 FT

MODEL BK-CABLE-1/8
MATERIAL GALVANIZED
DIAMETER 1/8" (7X7)
STRENGTH 1700 LBS RATING
ROLL SIZE 250 FT

CABLE WIRE CLAMPS



MODEL BK-CABLE-CLAMP-1/16
MATERIAL GALVANIZED

MODEL BK-CABLE-CLAMP-1/8
MATERIAL GALVANIZED

WIRE TIES (SS)









MODEL BK-TIES-SS
MATERIAL STAINLESS STEEL
LENGTH 5"
WIDTH 1/6"
STRENGTH 150 LBS RATING
QTY PACK 100

WIRE TIES (NYLON)



MODEL BK-TIES-BK
MATERIAL HEAVY DUTY NYLON
LENGTH 8"
WIDTH 1/3"
STRENGTH 120 LBS RATING
QTY PACK 100

DESIGN IDEAS (POSTS, POLES, HOOKS NOT SUPPLIED)





| | |
|---------|-----------|
| PROJECT | DATE |
| TYPE | CATALOG # |

SUBMITTAL SHEET

STEP 1 FIXTURE CONFIGURATION

| LENGTH | MODEL |
|--------------------------|------------------------|
| <input type="text"/> ft. | <input type="text"/> |
| Specify per foot | BK-E26 Standard Socket |

STANDARD STRING CUT

- All bistro string comes in Black finish.
- Each string has 1ft. before the first socket with a pigtail for hard wire (12v or 120v).
- Each string has 1ft. after the last socket with a sealed looped end. FOR ADDITIONAL 12V LEAD (BK-LEAD) OR 120V POWER PLUG (BK-PWR-MALE) PLEASE SPECIFY IN STEP 2

STEP 2 LEAD CONFIGURATION

| MODEL | LEAD LENGTH |
|-----------------------------|------------------------------|
| <input type="text"/> | <input type="text"/> ft. |
| BK-LEAD Lead Wire (per ft.) | Specify per foot for BK-LEAD |
| BK-PWR-MALE 8 ft. Male Plug | |

LEAD ORDERING INFO

- All leads and power plugs are factory sealed and installed
- BK-PWR-MALE is for 120V installs at receptacles FOR ADDITIONAL 12V LEAD (BK-LEAD) OR 120V POWER PLUG (BK-PWR-MALE) PLEASE SPECIFY IN STEP 2

STEP 3 LAMP CONFIGURATION

| QTY | MODEL |
|----------------------|--|
| <input type="text"/> | <input type="text"/> |
| | <u>12V OPTIONS</u> |
| | LED-BK-S14-1-12-FIL 1W Filament LED - 2400K |
| | <u>120V OPTIONS</u> |
| | LED-BK-S14-1-120-FIL 1W Filament LED - 2400K |

STEP 4 SHADE OPTIONS

| QTY | MODEL |
|----------------------|--|
| <input type="text"/> | <input type="text"/> |
| | BK-111-BZ Petal Shade |
| | BK-411-BZ Hammered Shade |
| | BK-511-BZ Pyramid Shade |
| | • All shades are Bronze (BZ) outer finish with white reflective inside finish. |

STEP 5 ACCESSORY OPTIONS

| QTY | MODEL |
|--------------------------|---|
| <input type="text"/> ft. | BK-CABLE-GS-1/16 BK-CABLE-GS-1/8 |
| | Sold by the foot |
| QTY | MODEL |
| <input type="text"/> | BK-CABLE-CLAMP-1/16 BK-CABLE-CLAMP - 1/8 |
| | Sold individually |

| QTY | MODEL |
|----------------------|---|
| <input type="text"/> | BK-TIES-SS |
| | Stainless Steel Cable Ties (100 QTY Pack) |
| QTY | MODEL |
| <input type="text"/> | BK-TIES-BK |
| | Heavy Duty Nylon Ties (100 QTY Pack) |